

VRLA AGM Battery

BT-12M33AC[12V33Ah]



General Features

- Designed floating charging service life: 8 years (25°C)
- Sealed and maintenance free operation
- Safety valve installation for explosion proof
- Low self-discharge characteristic
- Wide operating temperature range from 0°C~40°C
- Lead Aluminum calcium Tin alloy high energy, prevent corrosion


Application

- DC power supply
- UPS/EPS power supply
- Electrical devices & instruments
- Security and fire alarm systems
- Telecom stations and power stations
- Medical equipment
- Emergency lighting systems

Physical Specifications

Nominal Voltage	Nominal Capacity (10HR)	Dimension				Weight ±2%	Internal Resistance (In full charge status)	Standard Terminals
		L	W	H	TH			
12V	33AH	196±2mm	130±2mm	154±2mm	166±2mm	Approx 10.0kg (22.0lbs)	≤ 8.5 mΩ	T20 (standard)

Dimensions

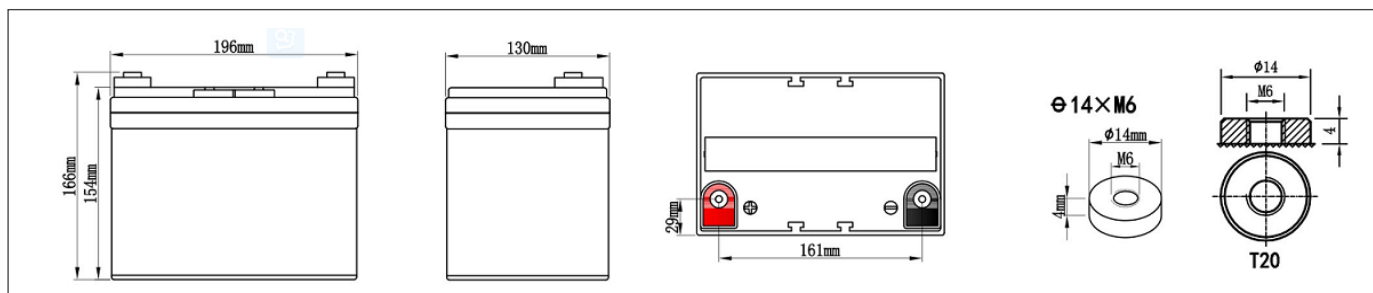

Constant-Voltage Charge

Rated Capacity	
20 hour rate (1.65A)	34.4AH
10 hour rate (3.30A)	33.00AH
5 hour rate (5.61A)	27.55AH
27 minute rate (33A)	17.50AH
7 minute rate (99A)	11.55AH
Capacity affected by Temperature	
40°C(104°F)	103%
25°C(77°F)	100%
0°C(32°F)	86%







Cycle Application
1. Limit initial current less than 8.25A.
2. Charge until battery voltage (under charge) reaches 14.1V to 14.4V at 25°C(77°F).
3. Hold at 14.1V to 14.4V until current drop to under 0.198A for at least 3 hours.
4. Temperature compensation coefficient of charging voltage is -30mV/°C.
Standby Service
1. Hold battery across constant voltage source of 13.6to 13.8 volts with current limit 7.75A continuously .When held at this voltage , the battery will seek its own current level and maintain itself in a fully charge status.
2. Temperature compensation coefficient of charging voltage is -18mV/°C.

NOTE : The battery should be charged within 6 months of storage, Otherwise, permanent loss of capacity might occur as a result of sulfation

Battery Discharge Table

End Voltage (V)	Minute (M)				Hour (H)							
	10	15	30	45	1	1.5	2	3	5	8	10	20
Constant Current Discharge Data Sheet (@25°C) Unit: A												
9.6V	85.9	69.6	35.3	24.9	20.9	14.6	12.2	9.26	5.98	3.96	3.42	1.77
9.9V	80.8	67.0	33.6	24.0	20.4	14.2	11.9	9.03	5.83	3.89	3.38	1.76
10.2V	78.0	63.5	32.0	23.2	19.9	13.8	11.6	8.81	5.69	3.81	3.35	1.74
10.5V	73.1	60.3	31.7	23.1	19.8	13.2	11.2	8.54	5.58	3.77	3.32	1.72
10.8V	68.4	57.1	31.5	23.0	19.7	13.1	10.8	8.26	5.47	3.73	3.30	1.69
Constant Power Discharge Data Sheet (@25°C) Unit: W												
9.6V	946	773	482	341	254	181	147	105	69.0	48.2	38.2	20.6
9.9V	912	750	459	329	248	179	143	102	67.4	47.2	37.8	20.4
10.2V	879	725	437	318	242	178	140	99.7	65.7	46.3	37.5	20.2
10.5V	847	702	428	311	238	175	138	97.5	65.0	45.9	36.9	19.9
10.8V	811	679	415	303	234	173	136	95.8	64.2	45.4	36.3	19.6

Performance Characteristics

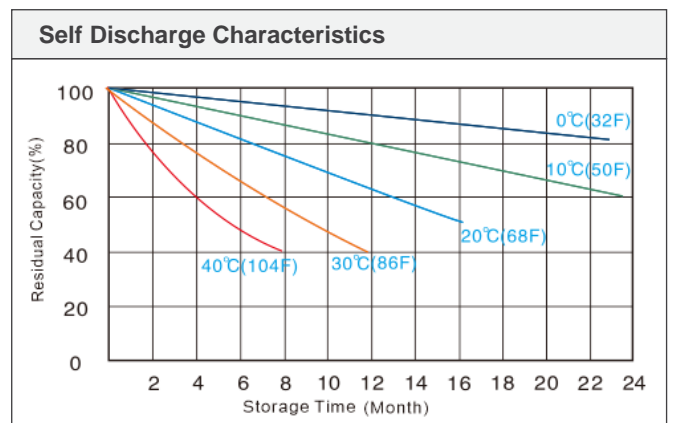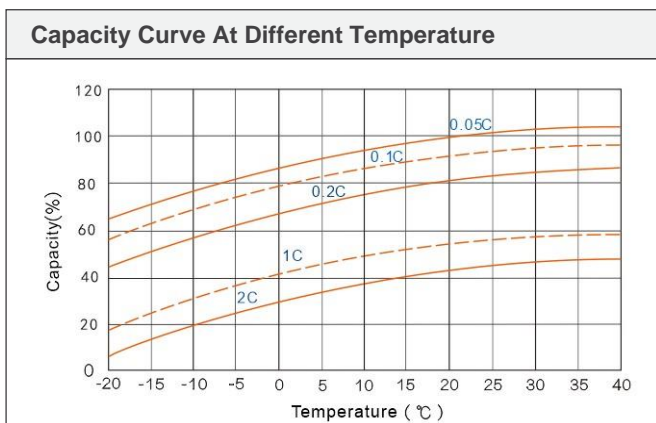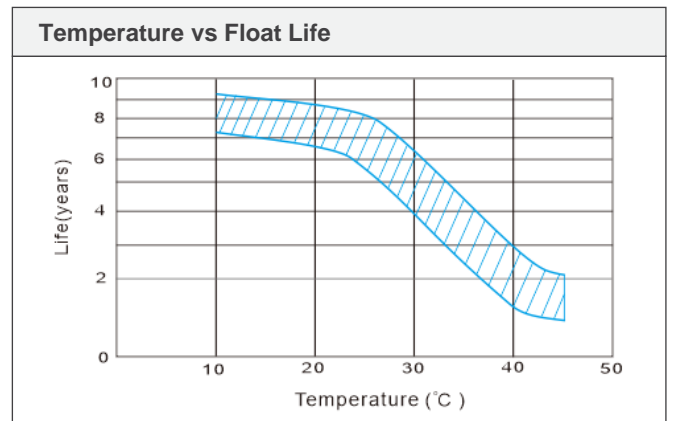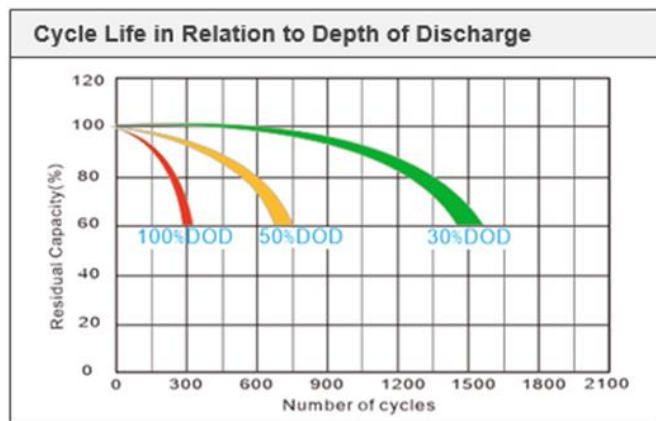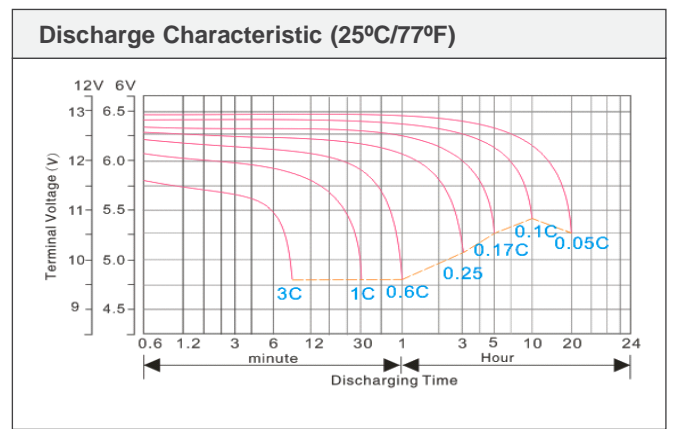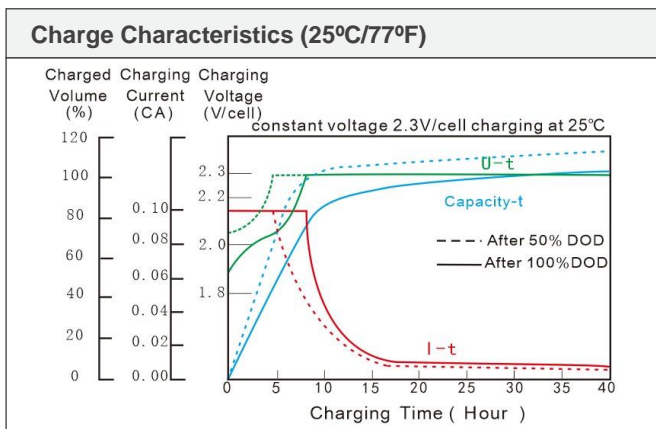

FACTORY ADDRESS:
 Road No.6, An Phuoc IP, An Phuoc Ward, Long Thanh District,
 Dong Nai Province, Vietnam

☎ 0084-978366669
 📠 0084-2513686918

✉ sales@saite.vn
 🌐 www.saite.vn